







- **▲ CONSTRUCTION CHEMICALS**
- **▲ EPOXY ADHESIVES**
- ▲ EPOXY & PU FLOORING
- WATER PROOFING PRODUCTS
- ▲ EPOXY RESIN & CURING AGENT
- **▲ ELECTRONIC & COMPOSITE**
- **▲ PAINT & COATING**
- **▲ STONE CARE**
- **▲ ART & CRAFT**
- **▲ FRP & PULTRUSION PRODUCT**







CONSTRUCTION **CHEMICAL**









ABOUT US

"D Fix Enterprise," Establish in the year 2015, with specializing in manufacturing a diverse range of products.











Located in Ahmedabad, Gujarat, India, We take pride on a spacious infra structural unit that enables us to produce a premium quality range of adhesives adhering to industry standards.

This infrastructure helps us to provide effective solutions across various sectors. Our main motto is ensuring customer satisfaction through excellence in product quality and service.

INTRODUCTION

D Fix is a leading company which provides innovative, high-performance products in Construction Chemicals, Epoxy Adhesives, Art & Craft, Epoxy & PU Flooring Division, Stone care Division with dedication in enhancing the durability, strength, & sustainability of various professionals projects of Builders, Architects & Structural Engineers. With a commitment to excellence, we offer a comprehensive range of specialized products designed to meet the diverse needs.

MISSION


D Fix believes in Driving success through creativity, collaboration, and a commitment to excellence. We invite you to join us on our journey of innovation, sustainability, and exceeding expectations, together.

VISION

"To be the most trusted and respected brand, delivering exceptional value and making a positive impact on society."



BUSINESS MARKET

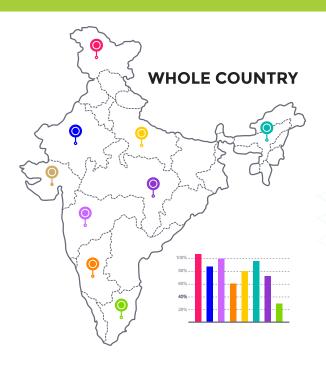

AFRICA
MIDDLE EAST
NEIGHBOURING COUNTRIES





BRANDING

WE ARE CONTINUOUSLY ACTIVE ON

SOCIAL MEDIA MARKETING

NEWS PAPER ADS

MAGAZINE ADS

WEB BASED

POSTERS

HOARDINGS

GLOW SIGN BOARDS

APPLICATOR MEET

SHOP MEET

EXHIBITIONS



OUR DIVISON



CONSTRUCTION CHEMICALS



EPOXY ADHESIVE



STONE CARE & TABLE TOP



EPOXY & PU FLOORING



INDUSTRIAL DIVISION

















TILE ADHESIVE



D+ GP - 1000 POLYMER BASED TILE ADHESIVE



USE:

- Ceramic tiles
- Porcelain tiles
- Medium Porosive stone

SUBSTRATE

- Plaster
- Cement base surface
- RCC Surface
- AAC block surface
- Mosaic tile surface

COVERAGE

30 to 35 Sqft. per 20kg Bag at 3mm thickness

Packing: 20Kg

TILE ADHESIVE





ODFIX** YOU DESERVE THE BEST

USE:

- Ceramic tiles
- Porcelain tile
- Vitrified tiles
- Small Size Stone

SUBSTRATE

- Plaster
- Cement base surface
- RCC Surface
- AAC block surface
- Mosaic tile surface
- Stone & red brick surface

COVERAGE

30 to 35 Sqft. per 20kg Bag at 3mm thickness 65 to 70 Sqft. per 40kg Bag at 3mm thickness

COLOUR: WHITE & GRAY

TILE ADHESIVE



D+ GOLD 3000

POLYMER BASED TILE ADHESIVE



USE:

- Big Formats
- Natural Stone

SUBSTRATE

- Plaster
- Cement base surface
- RCC Surface
- AAC block surface
- Tile On Tile

Stone & red brick surface

COVERAGE

30 to 35 Sqft. per 20kg Bag at 3mm thickness 65 to 70 Sqft. per 40kg Bag at 3mm thickness

COLOUR: WHITE & GRAY

TILE ADHESIVE



HIGH POLYMER BASED TILE ADHESIVE



USE:

- Porcelaine tile
- Vitrified tiles
- Glass Mosaic tiles
- Big Format Tiles & stone

SUBSTRATE

- Plaster
- Cement base surface
- AAC block surface
- Mosaic tile surface
- Stone surface
- Red brick surface

COVERAGE

30 to 35 Sqft. per 20kg Bag at 3mm thickness

COLOUR: WHITE & GRAY

BLOCK AHDESIVE



D+ BLOCK ADHESIVE-333
BLOCK JOINTING MORTAR



USE

- Light weight block jointing mortar work
- Brick application mortar work

ADVANTAGES:

- High bonding strength
- High surface area coverage
- Helps to reduce shrinkage, cracks or shortness
- High thermal insulation properties
- Economical and easy to use

PACKING

40Kg

READY MIX PLASTER







APPLICATION

Apply the mixed plaster uniformly on the prepared substrate using a steel trowel. The plaster can then be leveled to a desired finish using masonary tools. Different finish can be achieved using steel trowel, wooden float or sponge, as per finish required.

MIXING

In a clean tray or bucket mix thoroughly one 40 kg bag with approximate 6.5 to 6.8 liters of clean potable water (depending upon the weather condition). It is recommended to use mechanical mixer to achieve a homogeneous mix. For large quantity a mixer such as a concrete mixer can be used. Allow the mix to mature for 5 minutes before application.

PACKING

40 Kg Bag

FLOOR HARFENER



D+ FLOOR HARDENER -333

NON - METALLIC FLOOR HARDENER



APPLICATION

This is a high-quality, long-lasting, cementitious-based, non-metallic and non-oxidising concrete floor hardener, free from organic impurities. This hard-wearing dry shake powder is a well-manufactured graded composition of select cement, additives, graded aggregates and polymers that ensure ease of placing and finishing.

USE

- Garages
- Aircraft hangers
- Helipad
- Car washing
- Loading areas
- Parking area
- Mechanical workshops
- Warehouse
- Assembly house for automobile industry

PACKING

40 Kg Bag

FOUNDATION GROUT



D+333 FOUNDATION GROUT

MACHINE FOUNDATION GROUT / NON-SHRINK GROUT



USE

- Free Flow
- High Strength
- Self Curing
- Good Flow & Level

COVERAGE

- For Industrial Heavy Duty Machinery Foundation
- Steel Structure Foundation
- Filling of Core Cutting Gap

PACKING

40Kg Bag

STRUCTURAL REPAIRING



D+ MIRCO CONCRETE - MRM - 333



FEATURES & BENEFITS:

- For repairs to damaged reinforced concrete elements particularly where access is restricted and where vibration of the placed material is difficult or impossible
- Suitable for various structural strengthening measures such as filling honeycombs and cracks

PACKING

40 Kg Bag

DECORATIVE WHITE CEMENT



D+ WHITE CEMENT



APPLICATION

White cement gives superior fineness and whiteness. It has a high refractive index and high strength it gives smooth finish even when blended with pigments. It gives you the freedom to play with a wide palette of colours, textures, shapes & sizes, and is the most preferred when it comes to decorative paints, plasters, mosaic tiles, terrazzo flooring and white cement-based-value-added products.

PACKING

1, 5 & 20Kg Bags

WALL PUTTY



D+ MASTER WALL PUTTY



FEATURE:

- Wall plaster
- Ceilings
- RCC surfaces
- Repair works
- Smoothing of walls for both indoor and outdoor
- Renders a smooth and durable surface
- Under layer for all kinds of decorative paints

ADVANTAGES

- Suitable for both Internal and external applications
- Water-resistant
- Excellent adhesion to host subtrate
- Smooth finish
- Low water absorption
- Suitable for leveling prior to the application of oil based or water based coatings

PACKING

20 & 40 Kg Bags

EPOXY & PU BASE ADHESIVE



D+ DIAMOND

2 COMPONENT HIGH BUILD EPOXY BASE ADHESIVE



USE:

- 2 Component Epoxy Base Tile & Stone Adhesive for Steel, Iron, Aluminum & Dry Wall Surface..
- Laying porcelain tiles, marble and natural stone, on floors and walls, on absorbent and nonabsorbent and deformable substrates

ADVANTAGES:

- Suitable for super architectural structure
- Suitable for all types of tiles and stone laying
- Suitable for all types of substrate either absorbent or non-absorbent
- Better adhesion properties

PACKING

1.5 Kg SET

EPOXY & PU BASE ADHESIVE



D+ DELASTICK PU

TWO COMPONENT PU BASED ADHESIVE



APPLICATION INSTRUCTIONS

Pour the hardener (component B) into component A and mix well until a uniform paste is obtained. It is advisable to use a low speed electric stirrer to ensure perfect mixing and avoid overheating the mix, which would reduce the working time. Use the mix within 30-40 minutes of mixing. The adhesive is applied with a smoothing tool and combed with a suitable notched trowel. Place tiles firmly in position with a slight twisting motion to ensure sufficient wetting. Remove adhesive coming up through the grouts during gluing immediately.

Features:

- Water-proof
- · Long open time
- · High tensile, Compression and shear strength
- · Safe application and Multi-purpose use
- · Hardening without shrinkage
- · Excellent durability and Resistant to ageing

PACKING

4 Kg PACK

EPOXY & PU BASE ADHESIVE



D+ DEXURA

TWO COMPONENT ELEXIBLE ADHESIVE



APPLICATION INSTRUCTIONS

All types tiles, glass mosaic tiles, large format tiles, precast terrazzo, all-natural stones, large thin/slim tiles, composites / artificial / nano engineered stone, metal & glass tiles.

Features:

- Water-proof
- · Long open time
- · High tensile, Compression and shear strength
- Safe application and Multi-purpose use
- · Hardening without shrinkage
- Excellent durability and Resistant to ageing

PACKING

4 Kg PACK

PART A: 3.650Kg PART B: 0.350Kg

EPOXY GROUT



D+ EPOXY TILE GROUT 2 PART



USE:

- Wall & Floor Tiles & Stone
- Laboratories
- Food processing plants
- Hospitals, abattoirs
- Kitchen and swimming pools etc.

ADVANTAGES:

- Easy Application
- Better Durability
- Waterproof
- Can be used for both interior and exterior uses
- Excellent resistance to acid and alkalis

PACKING

1 & 5 Kg PACK PART A: 700gm

PART B: 300gm







APPLICATION:

Spread the D+ PIXEL Epoxy mix generously with float making sure to fill all gaps completely. Add fresh mix frequently to ensure that all parts of the surface are properly grouted. Start from one end and work towards the opposite end in smooth continuous motions coating the surface as evenly as possible. Work from the bottom to up when grouting walls. Use the edge of the float to remove excess grout. Exposed to an ambient temperature of 30°C the grout must be applied within 35 minutes of mixing.

PACKING: 1 & 5kg PACK

PART A: 900gm PART B: 100gm

EPOXY TILE GROUT



D+ CLASSIC EPOXY TILE GROUT - 3 PART



USE:

- Wall & Floor Tile & Stone
- Laboratories
- Food processing plants
- Hospitals, Kitchen and swimming pools etc.

ADVANTAGES:

- Easy for fast application
- Better durability
- Waterproof
- Can be used for interior
- Excellent resistance to acid and alkalis
- High bond strength to steel, concrete and tiles

PACKING

1 & 5 Kg PACK

EPOXY TILE GROUT



D+ CLASSIC EPOXY GROUT	D+ CLASSIC EPOXY GROUT	D+ CLASSIC EPOXY GROUT
JAISALMER	CREAMY CHOCOLATE	BROWN
BLACK	S.S. GREY	VALLY GREEN
YELLOW	НЕМР	SABLE
OLIVE GREEN	TOMATO RED	WHITE
DARK GREY	IVODV	GREEN
DARK GREY	IVORY	GALLIN
DEEP RED	DARK BLUE	ROYAL TERRACOTTA
ALP. BLUE	CO. BROWN	DEEP BROWN
SKY BLUE	KESAR	BLOOD RED
	ALL COLOURS ARE AVAILABLE IN SILVER, GODEN, COPPER GLITTER SPARKLE	
S.D. GREY		

CEMENT TILE GROUT



D+ CEMENTO POLYMER GROUT

POLYMER MODIFIED GROUT



USE:

- Vitrified tile
- Marble
- Natural stone
- To fill the tile joints with grout so as to create strong long lasting tile joints

ADVANTAGES:

- Extra fine finish
- High resistance to sunlight
- Easy to clean
- High performance grout
- Excellent water resistance
- Designed for grouting wall & floor tiles, marbles, & stones etc.
- Natural antibacterial

PACKING

500gm & 1kg PACK

WATER PROOFING CHEMICALS







APPLICATIONS

- Cement-concrete water storage tanks
- Damp walls (interior/exterior)
- As a primer before painting (interior / exterior)
- Toilet and kitchen walls
- Coating on walls of breweries & food processing industries
- As a putty with OPC-white cement to fill the fine cracks of external walls
- Hatcheries & aqua farms

PACKING

1, 5 & 20Kg



D+ PREMIUM SBR-111 / SBR-110

STYRENE BUTADIENE LATEX WATERPROOFING COMPONENT



USE:

- Waterproofing sunk, bathrooms, chajjas & lift pits, & balconies.
- Liquid & effluent tanks, car deck and walk ways.
- Repairs of plaster cracks more than 5 mm
 in gaps developed between masonry and RCC members.
- As bonding slurry coat for pin hole treatment on concrete surface & as repair mortar for overhead applications.
- As a bond coat plaster to plaster, concrete-to- old concrete, plaster to concrete masonry to stone work etc.

PACKING

500gm, 1, 5, 20, 50 and 200 kg

WATER PROOFING CHEMICALS



D+ ULTRACRETE 112

SINGLE COMPONENT POLYMER FOR CEMENT BASED WATERPROOFING COATING



USE:

- Roofs, terraces and balconies
- Pools and fountains
- Water Storage Tank,
- RCC & Masonry
- Reservoirs and channels
- End walls subjected to rain

PACKING

500gm, 1, 5, 10, 20 and 200kg



D+ ULTRACRETE PLUS 2K 113
ACRYLIC POLYMER MODIFIED ELASTOMERIC CEMENTITIOUS
2K WATERPROOFING MEMBRANE



USE:

- Water tanks, Swimming pools
- Roofs and terrace of all types of low & high rise building
- To re-face and even out variations in concrete and masonry surfaces
- To seal concrete masonry walls and bridges the shrinkage cracks which are static
- To provide a tough and durable coating which cannot be easily damaged or worn away

PACKING

3Kg, 15Kg & 30Kg set

CONCRETE ADMIXTURE



D+ MULTIPURPOSE LW-222

INTEGRAL WATERPROOFING COMPOUND



USE:

Use cement mortar, cement plaster & cement concrete

BENEFITS:

- Increases strength,
- Improves work ability
- Reduction in corrosion of steel
- Makes cohesive concrete

APPLICATION PROCEDURE

Add 200gm in a 50kg cement bag

PACKING

500gm, 1, 5, 10, 20, 50 and 200 kg



D+ WM -500HEAVY DUTY WHITE MEMBRANE WATER PROOF COATING FOR TERRACE APPLICATION



USE:

- Building roofs / Terraces-
- Flat & slope
- RCC Structure
- Masonry Walls

ADVANTAGES:

- High Film thickness
- Crack bridging Property
- U.V.Resistance
- Long Lasting
- Breath ability

PACKING

4 & 20Kg

WATER PROOFING CHEMICALS





HEAVY DUTY EALSTOMERIC MEMBRANE COATING



USE:

■ Bathroom, Sunks, Water tank, Retaining Walls, Life pits

ADVANTAGES:

- Single component
- Easy to apply, Cost effective
- Quick drying
- Excellent Adhesion strength

PACKING

4 & 20Kg Pack



D+ LEAKPROOF
HEAVY DUTY REINFORCED ACRYLIC WATER PROOF COATING FOR TERRACE / EXTERIOR WALL



USE:

- Building roofs / Terraces Flat & slope
- RCC Structure
- Over existing cementitious waterproofing treatments like brick-bat coba & Concrete Screeds

ADVANTAGES:

- Film thickness Provides higher dry film thickness of minimum 1 mm in three coat application Crack bridging - Good Bridges
- Suitability Can be used for flat as well as sloping roofs
- Easy for Applicable By Brush & Roller

PACKING COLOUR

1, 4 & 20Kg WHITE & BLACK

WATER PROOFING CHEMICALS



D+ CRACK & FIX



APPLICATION

- Concrete Primer
- **■** Epoxy Injection Grout
- Epoxy Mortar
- Repair Compound
- Bonding Agent for Old & New Concrete

COVERAGE

45 Sq Ft for 2 Coats / Per Kg

PACKING

1.5, 7.5 & 45Kg



D+ MCW 1KPU

SINGLE COMPONENT WATERPROOFING PU



APPLICATIONS

After 24 hours of duration time at room conditions, it should be mixed with a low circuit mixer and suitable tool to mix, until the mixture be homogenous. MCW 1K PU 1K can be be applied using a brush or roller. A minimum thickness of 1mm dried film thickness of MCW 1K PU. Layer should protect from water, rain, external effects, and mechanic compulsion.

- FAST CURING
- **EXCELLENT ADHESION**
- LOW ODOUR
- RESISTANCE TO PEDSTRION & LIGHT VEHICLE TRAFFIC
- SINGLE COMPONENT, EASY TO APPLY
- RESISTANCE TO WATER AND UV.

PACKING

25Kg Packs

WATER PROOFING CHEMICALS



PROCOAT 2K PU

POLYURETHANE WATER PROOFING MEMBRANE



USE:

- Roofs balconies, terrace and verandas wet area in bathroom, kitchen, balconies, auxiliary rooms, etc.
- Green roofs, flowerbeds, planter boxes
 Waterproofing and protection of concrete
 construction like bridge-decks, tunnels,
 stadium stands etc.
- Applied on any surface like Metal,
 Wood Cement Sheet, Corrugated
 Galvanized, RCC etc.

PACKING

5Ltr

CLEANING PRODUCTS



D+ KLENO TILE CLEANER



APPLICATION AREAS:

KLENO ADVANCE TILE CLEANER is high quality rapid active cleaner & decreasing solution for use on tiles, mosaic tiles bath tubs, wash basin & concrete etc. Whitish spot/layer as normally observed in the bathroom under plastic/matel buckets (normal detergent not helpful) Can be removed with is easy. Rapid removal of white yellowish spot/layer along with water stains over tiles. cement stains, grime, oil, paint stain, grease, moss and wax concrete, asbestos terrazzo & ceramics.

USE:

- Tile Cleaning
- Interior, exterior & Floor application

PACKING:

■ 500ml, 1 & 5 Ltr Packs

CLEANING PRODUCTS



RULY GLASS CLEANER



USE

TURN NOZZLE TO SPRAY OR STREAM POSITION FOR FINE MIST OVER SURFACE WIPE WHITE CLEAN DRY COTTON CLOTH TO GET CLEAN & EXTRA ORDINARY RESULT.

PERFECT FOR CLEANING

GLASS & SHINY SURFACE, LIKE MIRRORS, GLASS WINDOWS, FRIDGE, TV, OVEN, KITCHEN, CABINET, FURNITURE ETC. REMOVES DIRT, GRIME, OIL STAINS. CAN ALSO BE USED COUNTER TOP, FURNITURE WITH LAMINATES. ON COLOURED SURFACES LIKE APPLIANCES, CERAMIC TILES

PACKING

500ml

CLEANING PRODUCTS



RULY TAPO CLEANER



ADVANTAGES:

- Tapo Cleaner is liquid cleaning solution.
- Removes water scale from C P Bath Fittings.
- Removes Rust from stainless steel sink.
- Removes rust, stains, oily & sticky substances* from all the surfaces of stainless steel, ceramic & sanitary wares.

USE FOR CLEANING

 Home care, hospital's, hotels & restaurants, resorts, corporate offices, shopping malls, machineries & industries.

PACKING

250ml

REPAIR & MAINTENANCE



D+ POLYSULPHIDE - GG / PG



USE

- Precast elements
- External walls
- Curtain walling and cladding
- Panel walls
- Window and door perimeter

ADVANTAGES

- Forms a tough, elastic, rubber-like seal
- High resistance to ageing reduces physical damage due to climatic extremes

PACKING

4 Kg Packs

REPAIR & MAINTENANCE



D+ PU SEALANTPOLYURETHANE SEALANT - GREY/WHITE



D+ PU SEALANT Sealant is a one-part Polyurethane Sealant composed of polyurethane polymer, pigment, filler & additives. It is used for filling and sealing joints in buildings & structures. It is highly elastic & resilient; weather durable, none sagging, watertight with excellent adhesion to almost all building construction materials. It can be over coated.

USE

- Precast elements
- Parapets
- External walling
- Culverts of bridge
- Curtain walling and cladding
- Retaining walls
- Panel walls
- Window and door perimeter

PACKING

600ml capsule

REPAIR & MAINTENANCE



ANCHOR GROUT



DESCRIPTION

AG 100 Anchor Grout is polyester resin based grout material suitably blended with a hardening compound and fillers and supplied as a pre measured, two part, resin grout. After hardening , the grout has high mechanical properties. Bostik Anchor Grout is used where the difference between the hole diameter and bar diameter is ≤ 25mm.

USE: AG 100 Anchor Grout is used for high strength corrosion resistant anchoring of bolts and bars from 12-25mm diameter into concrete, rock, masonry or brickwork where high speed of installation and early application of load is required. Permanent installation of reinforcement starter bars, foundation bolts, base plates, barriers and safety fences, railway tracks, tieback anchors, reinforcement dowelling abutments, ground anchors for towers, cranes, dock sills.

PACKING: 1Kg PACK

REPAIR & MAINTENANCE



D+ CRACKSEAL PASTE



FEATURE:

Surface must be free from dust, oil, grease, and loose particles etc. Moisten the surface before applying D-Fix Crack Seal Paste. Fine hair line cracks must be widened up to minimum I mm and then to be filled For filling D Fix Crack Seal Paste on the internal surface, existing POP or painter's putty must be removed till plaster surface is exposed. Then fill D Fix Crack Seal Paste into the crack, when the surface is tacky. Press D Fix Crack Seal Paste firmly into the crack with a spatula or putty knifes & level with the surface. Care must be taken to avoid formation of cavities or bubbles during application. Allow it set for 24 hours and then apply another coat of D Fix Crack Seal Paste. Further POP or painter's putty application can be taken up once it is fully dry. For best results allow D Fix Crack Seal Paste to cure for 7 days.

PACKING

1 & 5 Kg PACKS

REPAIR & MAINTENANCE







FEATURES & BENEFITS:

- PU INJECTION Grout Is used to seal & inject crack in Concrete floors, walls & structures.
- In provides deep penetration, shrink free soild mass, strong bonding inside the cracks & excellent resistance.
- ■For honey combing & cracks

PACKING

11Kg PACK

INTERIOR EXTERIOR PRIMER



PRIME SOL

WATERBASE CEMENT PRIMER



Benefits

- Long Lasting
- Velvet Silk Finish
- Royal Look
- Anti Bacterial & Anti
- Fungal Protection

Features

Washability : Best in Class

Finish : Smooth Feather Finish

Application : Interior Wall

■ Tools : By Brush, Roll & Spray

PACKING

20Ltr

EXTERIOR PAINT





ODFIX** YOU DESERVE THE BEST

Benefits

All Weather Protective Resistance to Ultraviolet Rays Anti-algal Weather Proof

Features

Washability: Best in Class

Finish : Smooth Luster Finish

Application Exterior Wall

Tools : By Brush, Roll & Spray

PACKING

20Ltr

INTERIOR PAINT



FEATHER FEEL PRIMUM EMULISON



Benefits

- Long Lasting
- Velvet Silk Finish
- Royal Look
- Anti Bacterial & Anti
- Fungal Protection

Features

■ Washability: Best in Class

■ Finish : Smooth Feather Finish

Application : Interior Wall

■ Tools : By Brush, Roll & Spray

PACKING

20Ltr

WATERPROOFING COATING



D+ TERRASEAL 007

WATERPROOFING COATING TERRACE & NATURAL STONE



APPLICATIONS

TERRASEAL is a transparent acrylic U.V. resistance that provides resistance to weathering, low foot traffic, and offers waterproofing properties. Typical applications include a clear acrylic base for china mosaic tiles & Decorative stone. (Enhancer)

PACKING

1, 5, 25Kg

WATER REPELLENT



WR 700 SILICON WATER BASE REPELLENT



APPLICATIONS

Cement painted surfaces., Concrete, mortar, Clay brick surfaces, Natural and artificial stones. Mangalore tiled roofs, Corrugated AC sheet roofing, etc.

BENEFITS:

Ease of application - Ready to use, simply brush able or spray applied.

Staining - Clear coating does not stain the treated surface.

Appearance - Does not change the appearance of exterior decorative coating.

Economical Cost effective

PACKING

1, 5 & 25 Ltr

WATER REPELLENT



WR 800 SILICON SOLVENT BASE REPELLENT



APPLICATIONS

SILICON S800 is used to provide water repellent surface with improved self cleaning properties on exterior building- brick work, concrete, cement rendering, natural or cast stone.

BENEFITS:

- Protects concrete
- Protects brickwork
- Self-cleaning
- Ready to use

PACKING

10 & 20Kg

EPOXY ADHESIVE



D FIX SS DF-R135 / DF-H235

SUPER STRENGTH, MULTIPURPOSE EPOXY ADHESIVE



FEATURE:

- Super strength epoxy adhesive
- Medium curing system

APPLICATION

- Fixing stones, marbles
- Grouting steel railings
- Stone mosaic
- Fixing jewel stones

MIXING RATIO

- 100:80 by weight
- 100:100 by volume

PACKING

450g, 900g, 1.8kg, 9kg

EPOXY ADHESIVE







CLER & CLEAR DF-H 486 Plus is a proven solution for large DIY projects and industrial usage as it possesses no pungent smell. It is suitable for preparing artificial jewellery, handicrafts, artifacts, and other engineering products.


Suitable for applications such as:-

- Artificial Jewellery
- Handicrafts Artifacts
- Glass furniture
- Bonding bigger applications demanding good clarity & aesthetics

PACKING 1 Kg



DIFSIL NATURAL SEALANT

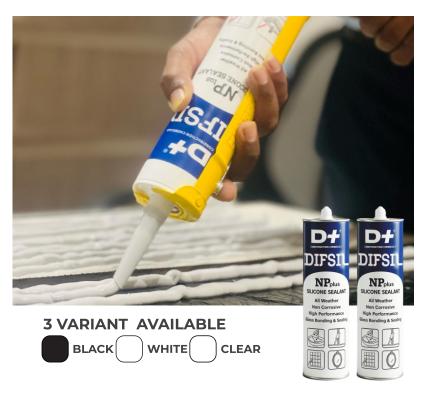

APPLICATIONS

D+ DIFSIL can be used for bonding & sealing Glass, Aluminium Composite Panels (ACP), Aluminium Door/Window Frames, Facade, etc.

EXCELLENT WORKABILITY

HIGH SOLID CONTENT

LOW SHRINKAGE

Packing: 280ml



DIFSILWEATHER PROOFING SEALANT



D+ DIFSIL 1705 SILICON WEATHER PROOFING SEALANT is specifically formulated for use in various applications, including general glazing and weather sealing for curtain walls and building facades, offering reliable adhesion across a range of construction materials and temperatures.

- NEUTRAL CURE
- ONE-PART-NO MIXING ALL TEMPERATURE GUNNABILITY
- UNPRIMED ADHESION TO MOST COMMON BUILDING MATERIALS
- WEATHERPROOFING BUILDING JOINTS

Packing: 300ml & 600ml

ADHESIVE




D+ HIPPOQUICK LV

TODO NAHI JODO!

PACKING 20 & 50gm PACK

D+ PIPO BOND

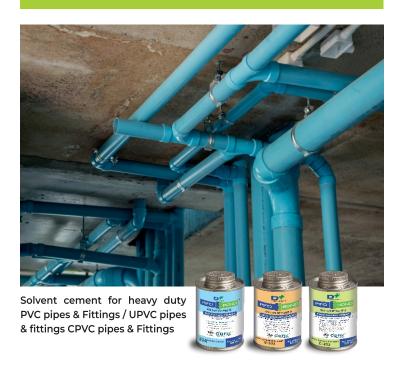

ADHESIVE



ROAD REFLECTORS KIT



WOOD FILLO





D+ EPOXY INJECTION GROUT



FEATURES & BENEFITS:


■Is Used to seal & Inject Cracks in Concrete floors, Walls & Structures It Provides deep penetration, Shrink free solid mass, strong bonding inside the cracks & excellent resistance to honey combing & cracks

PACKING

11Kg PACK

EPOXY FLOOR COATING



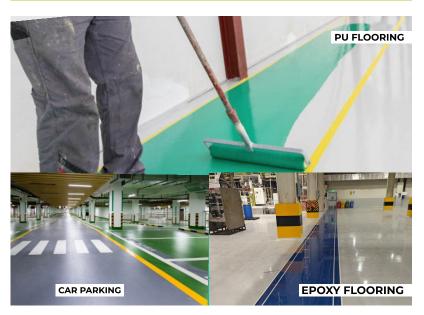

ODFIX TM YOU DESERVE THE BEST

USE

- Industrial floorings
- Car Deck System
- FMCG Industries
- Pharmaceutical Companies
- Shopping Malls

ADVANTAGES

- Good abrasion resistance create durable floors
- Provides better hygienic floor condition
- Provide a dense, impervious, seamless floor surface which is easily cleaned
- Epoxy floor has a no seams, Joints, Cracks, Pores& Gaps make the flooring is immune to any kind of dirt, dust, Water & Chemical



NOTES:





PREMIUM QUALITY CONSTRUCTION CHEMICAL THAT IMPARTS MORE LIFE

OUR DIVISION

- **4 CONSTRUCTION CHEMICALS**
- **4 EPOXY ADHESIVES**
- **▲ EPOXY & PU FLOORING**
- **4 WATER PROOFING PRODUCTS**
- **4 ELECTRONIC & COMPOSITE**
- **4 PAINT & COATING**
- **▲ STONE CARE**
- **▲ ART & CRAFT**
- **4FRP & PULTRUSION PRODUCT**











WOOD FILLOTM





D FIX ENTERPRISE

506, PARSHWANATH BUSINESS PARK, NEAR PRAHLAD NAGAR GARDEN, OFF. SG HIGHWAY, AHMEDABAD - 380015, GUJARAT.

